CULP HOSPITALITY


Bleecker

i-Clean® Barrier Plus™ Performance


Bleecker features an organic, allover motif with softly fragmented forms that create subtle movement across a richly textured surface, balancing abstract pattern with an understated, versatile aesthetic.



- 100% Polyester; Moisture Barrier Film Backing
- Repeat: 14.65″ x 14.17″
- Made in China
- Heavy Duty - 100,000 Cycles (Wyzenbeek - Cotton Duck Abradant) (ASTM D4157)
- Light Fastness: Class 4/40 hrs. min. (AATCC16A)
- Color Fastness, Wet: Class 4.5 (ASTM D3597, AATCC 8)
- Color Fastness, Dry: Class 4.5 (ASTM D3597, AATCC 8)
- Brush Pill: Class 4 (ASTM D3511)
- Breaking Strength: 239 lbs. Warp, 325 lbs. Weft (ASTM D5034)
- Seam Slippage: 56 lbs. Warp, 78 lbs. Weft (ASTM (D4034)

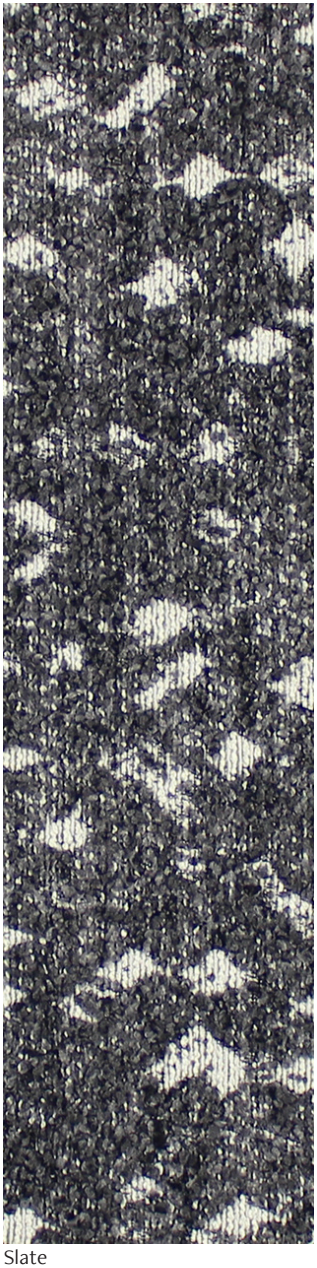

Slate

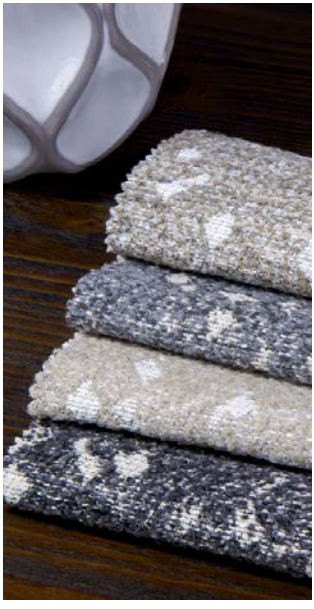



Quarry



Wheat



Glacier