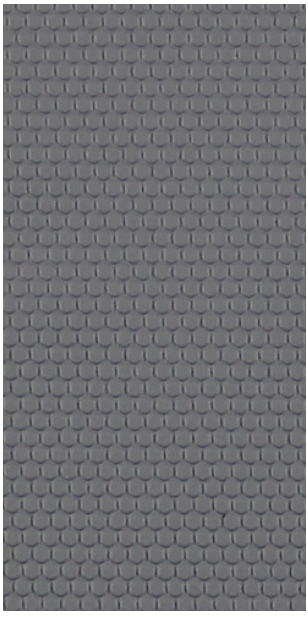
Dot Com


i-Clean® Performance


Dot Com features a finely embossed dotted texture that adds subtle dimension and visual rhythm, pairing distinctive surface interest with PVC free durability.





- 100% Polyurethane; 85% Polyester, 15% Cotton Backing
- Antimicrobial
- Made in China
- Heavy Duty - Exceeds 200,000 Cycles (Wyzenbeek - Wire Screen Abradant) (ASTM D4157)
- Light Fastness: Class 4/200 hrs. min. (AATCC16A)
- Color Fastness, Wet: Class 4 (ASTM D3597, AATCC 8)
- Color Fastness, Dry: Class 4 (ASTM D3597, AATCC 8)
- Breaking Strength: 75 lbs. Warp, 111 lbs. Weft (ASTM D5034)
- Seam Slippage: 36 lbs. Warp, 61 lbs. Weft (ASTM (D4034)
- Flex Resistance: 50,000 Cycles (CFFA 10)
- Pass (CFFA 6a) Cold Crack
- Pass (ISO 1419) 10 Weeks



Gray


White


Batik


Platinum



River


Nude



Lawn



Coin


Fawn


Honey


COla


Clay


Black


Cinnabar